

0514 SERIES







Pitch: 1.27mm(0.05"), For 0.40 Square Pin Female Header Single Row Straight

Specifications

Current Rating: 1Ampere
 Insulation Resistance: 500MΩ Min.
 Dielectric Withstanding: 300V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Contact Plating: Gold/Tin over Nickel
 Insulator: Glass Filled Polyester (UL 94V-0)

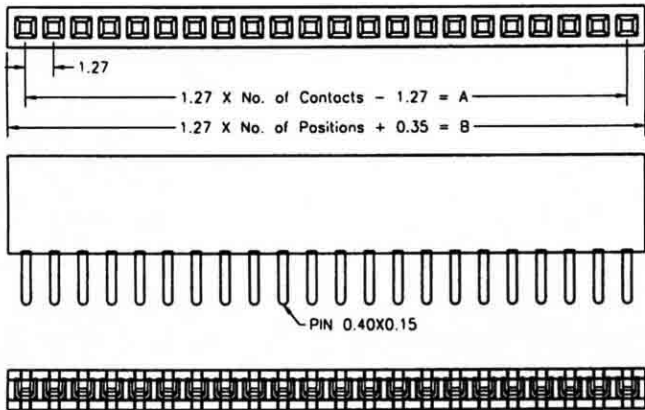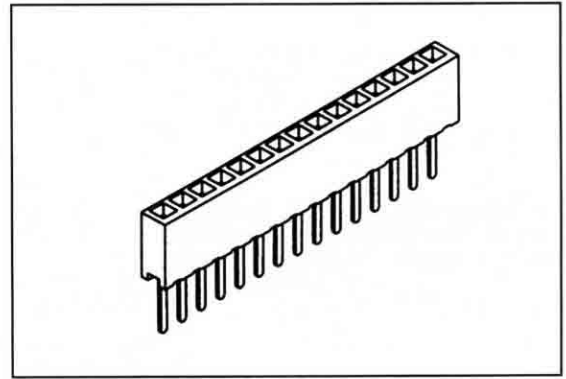

No. of PIN/ROW	Dimension Information		No. of PIN/ROW	Dimension Information		No. of PIN/ROW	Dimension Information		No. of PIN/ROW	Dimension Information	
	A	B		A	B		A	B		A	B
04	3.81	5.43	11	12.70	14.32	18	21.59	23.21	25	30.48	32.10
05	5.08	6.70	12	13.97	15.59	19	22.86	24.48	26	31.75	33.37
06	6.35	7.97	13	15.24	16.86	20	24.13	25.75	27	33.02	34.64
07	7.62	9.24	14	16.51	18.13	21	25.40	27.02	28	34.29	35.91
08	8.89	10.51	15	17.78	19.40	22	26.67	28.29	29	35.56	37.18
09	10.16	11.78	16	19.05	20.67	23	27.94	29.56	30	36.83	38.45
10	11.43	13.05	17	20.32	21.94	24	29.21	30.83			

Ordering Information

0514 - X 3 1 - X X 0

1: Tin
 2: Gold
 3: Half Gold

Position